

**System and Control Theory**  
**Test of January 23, 2017**  
**Questions and Exercises**

Name:	
Nr. Mat.	
Signature:	

1. Write the explicit form of the *transition matrix*  $\Phi(k, h)$  of the linear time-variant system  $\mathbf{x}(k+1) = \mathbf{A}(k)\mathbf{x}(k) + \mathbf{B}(k)\mathbf{u}(k)$ :

$$\Phi(k, h) =$$

2. Write the explicit solution  $\mathbf{x}(k)$  of the difference equation  $\mathbf{x}(k+1) = \mathbf{A}\mathbf{x}(k) + \mathbf{B}\mathbf{u}(k)$  being  $\mathbf{x}(h)$  the initial state at time  $h$ .

$$\mathbf{x}(k) =$$

3. Write the general solution of the differential equation  $\dot{\mathbf{x}}(t) = \mathbf{A}\mathbf{x}(t) + \mathbf{B}\mathbf{u}(t)$  starting from the initial condition  $\mathbf{x}(0)$  at time  $t_0 = 0$ :

$$\mathbf{x}(t) =$$

4. Give the meaning, for discrete linear systems, of the symbol  $\mathcal{E}^-(k)$ :

$\mathcal{E}^-(k)$  is ...

5. Compute the reachability matrix  $\mathcal{R}^+$  and the observability matrix  $\mathcal{O}^-$  of the following system:

$$\begin{cases} \dot{\mathbf{x}}(t) = \begin{bmatrix} 1 & 0 & 0 \\ 1 & 0 & -1 \\ 1 & 1 & 0 \end{bmatrix} \mathbf{x}(t) + \begin{bmatrix} 1 \\ -1 \\ 0 \end{bmatrix} u(t) \\ y(t) = [1 \ 0 \ -1] \mathbf{x}(t) \end{cases} \quad \mathcal{R}^+ = \begin{bmatrix} \phantom{0} \\ \phantom{0} \\ \phantom{0} \end{bmatrix}, \quad \mathcal{O}^- = \begin{bmatrix} \phantom{0} \\ \phantom{0} \\ \phantom{0} \end{bmatrix}$$

The system is:  reachable  not-reachable  observable  not-observable

6. Compute, as function of the initial condition  $\mathbf{x}(0) = [x_1(0), x_2(0), x_3(0), x_4(0)]^T$ , the free evolution of the following discrete-time autonomous system:

$$\mathbf{x}(k+1) = \begin{bmatrix} 3 & 1 & 0 & 0 \\ 0 & 3 & 1 & 0 \\ 0 & 0 & 3 & 0 \\ 0 & 0 & 0 & 3 \end{bmatrix} \mathbf{x}(k) \quad \mathbf{x}(k) = \begin{bmatrix} \phantom{x_1(0)} \\ \phantom{x_2(0)} \\ \phantom{x_3(0)} \\ \phantom{x_4(0)} \end{bmatrix} \begin{bmatrix} x_1(0) \\ x_2(0) \\ x_3(0) \\ x_4(0) \end{bmatrix}$$

7. Apply the  $\mathcal{Z}$ -transform to the following *state* function:

$$\mathcal{Z} [\mathbf{x}(k+1) = \mathbf{A}\mathbf{x}(k) + \mathbf{B}\mathbf{u}(k)]$$

and provides the expression of the transformed function  $\mathbf{x}(z)$  of the state vector  $\mathbf{x}(k)$  as a function of the initial state  $\mathbf{x}_0$  and the transform  $\mathbf{u}(z)$  of the input signal  $u(k)$ :

$$\mathbf{x}(z) =$$



11. Given a SISO linear system of the fourth order ( $n = 4$ ), completely observable, characterized by matrices  $\mathbf{A}$ ,  $\mathbf{b}$  and  $\mathbf{c}$ .

a) Write the structure of the matrices  $\mathbf{A}_o$ ,  $\mathbf{b}_o$  and  $\mathbf{c}_o$  of the corresponding observability canonical form. Let  $p(\lambda) = \lambda^4 + \alpha_3\lambda^3 + \alpha_2\lambda^2 + \alpha_1\lambda + \alpha_0$  be the characteristic polynomial of matrix  $\mathbf{A}$ .

$$\mathbf{A}_o = \begin{bmatrix} & & & \\ & & & \\ & & & \\ & & & \end{bmatrix}, \quad \mathbf{b}_o = \begin{bmatrix} \\ \\ \\ \end{bmatrix}, \quad \mathbf{c}_o = \begin{bmatrix} & & & \end{bmatrix}$$

b) Moreover, write the structure of matrix  $\mathbf{P}$  which, together with the space transformation  $\mathbf{x} = \mathbf{P}\mathbf{x}_o$ , brings the system in the observability canonical form.

$$\mathbf{P} =$$

12. Write the Ackermann formula for computing the gain vector  $\mathbf{l}$  of an asymptotic state observer which freely places the eigenvalues of matrix  $\mathbf{A} + \mathbf{l}\mathbf{c}$ :

$$\mathbf{l} =$$

Write the structure of the desired polynomial  $p(\lambda)$  and matrix  $p(\mathbf{A})$  when three eigenvalues are located in  $\lambda = -1$  and other two eigenvalues are located in  $\lambda = -3$ :

$$p(\lambda) = \qquad \qquad \qquad p(\mathbf{A}) =$$

13. Given the following nonlinear differential equations in the state space:

$$\begin{cases} \dot{x}_1 = x_2 \\ \dot{x}_2 = x_3 \\ \dot{x}_3 = -3x_1 \sin^2 x_2 - 2x_2^3 + x_3^2 \tan x_1 + u(t) \end{cases}$$

Set  $[x_1 \ x_2 \ x_3]^T = [y(t) \ \dot{y}(t) \ \ddot{y}(t)]^T$ , write the corresponding third order nonlinear differential equation which links the input  $u(t)$  to the output  $y(t)$ :

...

14. Write the structure of the dual system  $\mathcal{S}_D$  corresponding to a given system  $\mathcal{S} = (\mathbf{A}, \mathbf{B}, \mathbf{C}, \mathbf{D})$ :

$$\mathcal{S}_D = ( \quad , \quad , \quad , \quad )$$

15. Given a system  $(\mathbf{A}, \mathbf{c})$  completely observable. The corresponding sampled system (being  $T$  the sampling period) is completely observable if and only if for each couple  $\lambda_i, \lambda_j$  of eigenvalues of  $\mathbf{A}$  having the same real part, it is:

...

16. Consider the point-to-point control problem for a discrete-time linear system. Among the infinite solutions  $\mathbf{u}$  which move the system from the initial state  $\mathbf{x}(0)$  to the final state  $\mathbf{x}(k)$  in the time interval  $[0, k]$  write the solution  $\mathbf{u}$  which minimizes the Euclidean norm:

$$\mathbf{u} =$$

17. Given the following continuous-time linear system  $\dot{\mathbf{x}}(t) = \mathbf{A}\mathbf{x}(t) + \mathbf{B}\mathbf{u}(t)$ ,  $\mathbf{y}(t) = \mathbf{C}\mathbf{x}(t)$ , write the expression of the matrices  $\mathbf{F}$ ,  $\mathbf{G}$  and  $\mathbf{H}$  that characterize the corresponding sampled system  $\mathbf{x}(k+1) = \mathbf{F}\mathbf{x}(k) + \mathbf{G}\mathbf{u}(k)$ ,  $\mathbf{y}(k) = \mathbf{H}\mathbf{x}(k)$  with period  $T$ :

$$\mathbf{F} =$$

$$\mathbf{G} =$$

$$\mathbf{H} =$$

18. Given the continuous-time linear system  $\dot{\mathbf{x}}(t) = \mathbf{A}\mathbf{x}(t) + \mathbf{B}\mathbf{u}(t)$ , write the structure of:  
 a) an **open loop state estimator** and the time evolution of the estimation error  $\mathbf{e}(t) = \mathbf{x}(t) - \hat{\mathbf{x}}(t)$  obtained starting from the initial condition  $\mathbf{e}(0)$ :

$$\dot{\hat{\mathbf{x}}}(t) =$$

$$\mathbf{e}(t) =$$

- b) an **full order closed loop state estimator** and the time evolution of the estimation error  $\mathbf{e}(t) = \mathbf{x}(t) - \hat{\mathbf{x}}(t)$  obtained starting from the initial condition  $\mathbf{e}(0)$ :

$$\dot{\hat{\mathbf{x}}}(t) =$$


$$\mathbf{e}(t) =$$

19. Write the direct Lyapunov stability criterion for continuous-time systems.

Consider the nonlinear system  $\dot{\mathbf{x}}(t) = \mathbf{f}(\mathbf{x}(t), \mathbf{u}_0)$  and let  $\mathbf{x}_0$  be an equilibrium point corresponding to the constant input  $\mathbf{u}_0$ .

1) If ...


20. Consider the following electric circuit composed by the capacities  $C_1, C_4$ , the inductances  $L_2, L_3$  and the resistances  $R_a$  and  $R_c$ . The system has two inputs: the voltage  $V_a$  and the current  $I_b$ . The outputs of the system are: the current  $I_a$  and the voltage  $V_b$ .

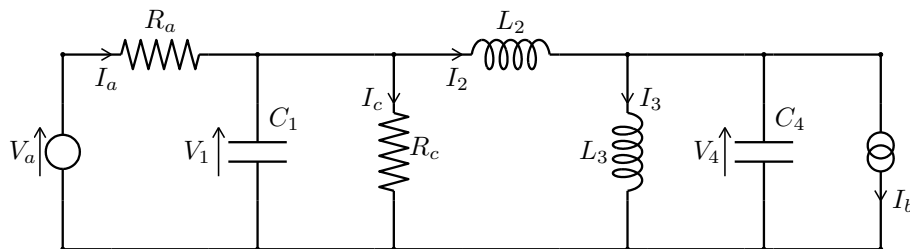

Write the POG model of the given electric circuit:



21. Consider the following POG scheme which describes the dynamics of an hydraulic circuit composed by the hydraulic inductances  $L_1, L_3$ , the hydraulic capacities  $C_2, C_4$  and the hydraulic resistances  $R_1, R_2, R_4$  and  $R_5$ :

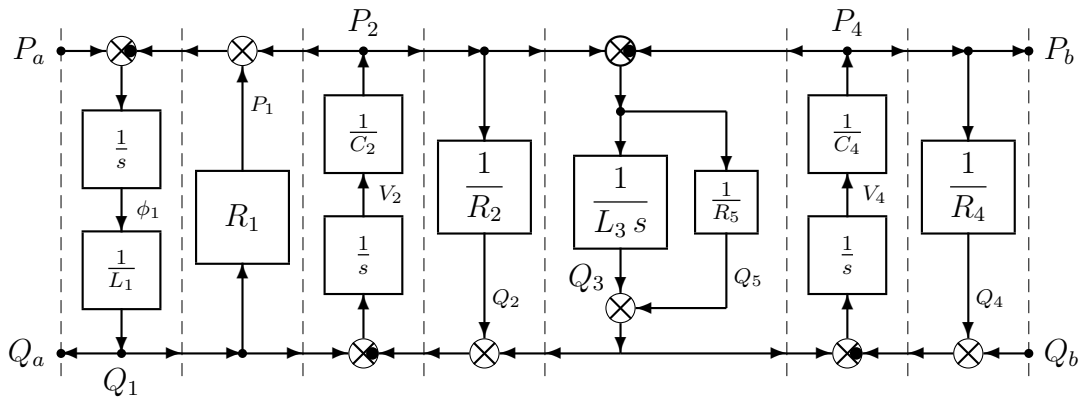


Let  $\mathbf{x} = [Q_1 \ P_2 \ Q_3 \ P_4]^T$  be the state vector,  $\mathbf{u} = [P_a \ Q_b]^T$  the input vector and  $\mathbf{y} = [Q_a \ P_b]^T$  the output vector. Write the corresponding dynamic system  $\bar{\mathbf{L}}\dot{\mathbf{x}} = \bar{\mathbf{A}}\mathbf{x} + \bar{\mathbf{B}}\mathbf{u}$  and  $\mathbf{y} = \bar{\mathbf{C}}\mathbf{x} + \bar{\mathbf{D}}\mathbf{u}$  in the state space:

$$\underbrace{\begin{bmatrix} \phantom{0} \\ \phantom{0} \\ \phantom{0} \\ \phantom{0} \end{bmatrix}}_{\bar{\mathbf{L}}} \underbrace{\begin{bmatrix} \dot{Q}_1 \\ \dot{P}_2 \\ \dot{Q}_3 \\ \dot{P}_4 \end{bmatrix}}_{\dot{\mathbf{x}}} = \underbrace{\begin{bmatrix} \phantom{0} \\ \phantom{0} \\ \phantom{0} \\ \phantom{0} \end{bmatrix}}_{\bar{\mathbf{A}}} \underbrace{\begin{bmatrix} Q_1 \\ P_2 \\ Q_3 \\ P_4 \end{bmatrix}}_{\mathbf{x}} + \underbrace{\begin{bmatrix} \phantom{0} \\ \phantom{0} \\ \phantom{0} \\ \phantom{0} \end{bmatrix}}_{\bar{\mathbf{B}}} \underbrace{\begin{bmatrix} P_a \\ Q_b \end{bmatrix}}_{\mathbf{u}}$$

$$\underbrace{\begin{bmatrix} Q_a \\ P_b \end{bmatrix}}_{\mathbf{y}} = \underbrace{\begin{bmatrix} \phantom{0} \\ \phantom{0} \end{bmatrix}}_{\bar{\mathbf{C}}} \mathbf{x} + \underbrace{\begin{bmatrix} \phantom{0} \\ \phantom{0} \end{bmatrix}}_{\bar{\mathbf{D}}} \underbrace{\begin{bmatrix} P_a \\ Q_b \end{bmatrix}}_{\mathbf{u}}$$

22. Add the **minus signs** to the following POG scheme in order to obtain a POG scheme correctly defined according the given positive directions of the power flows:

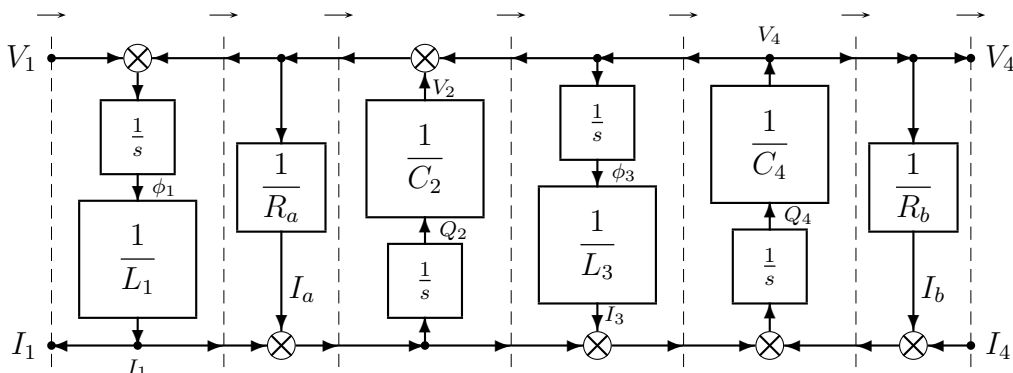

23. Which of the following functions  $V(x_1, x_2)$  are positive definite in the vicinity of the origin?

- $V(x_1, x_2) = x_1^2 + x_1^3 + x_2^2 + x_2^3;$ 
  $V(x_1, x_2) = x_1^4 \sin(x_2) + x_2^2 \cos^2(x_1);$   
  $V(x_1, x_2) = x_1^2(1 - x_1^3) + x_2^2(1 - x_2^3);$ 
  $V(x_1, x_2) = x_1^2 \sin^2(x_2) + x_2^4 \cos(x_1);$

24. Given the following nonlinear system  $\dot{\mathbf{x}}(t) = \mathbf{f}(\mathbf{x})$ , continuous-time and autonomous:

$$\begin{cases} \dot{x}_1 &= -x_1^3 + \alpha x_2 + x_3^6 \\ \dot{x}_2 &= -\alpha x_1 - x_2^3 \\ \dot{x}_3 &= 2\beta x_3 - x_3^5 \end{cases}$$

It is easy to verify that the origin  $\mathbf{x}_0 = (0, 0, 0) = \mathbf{0}$  is an equilibrium point for the system.

a) Compute, as a function of parameters  $\alpha$  and  $\beta$ , the Jacobian  $\mathbf{A}(\mathbf{x})$  of the nonlinear system:

$$\mathbf{A}(\mathbf{x}) = \frac{\partial \mathbf{f}(\mathbf{x})}{\partial \mathbf{x}} = \begin{bmatrix} & & \\ & & \\ & & \end{bmatrix}$$

b) Compute, as a function of  $\alpha$  and  $\beta$ , the matrix  $\mathbf{A}_0$  of the linearized system at point  $\mathbf{x}_0 = \mathbf{0}$ :

$$\mathbf{A}_0 = \begin{bmatrix} & & \\ & & \\ & & \end{bmatrix}$$

c) Study, for varying  $\alpha$  and  $\beta$ , the stability of the nonlinear system in the neighborhood of point  $\mathbf{x}_0 = \mathbf{0}$  using the reduced Lyapunov criterion:

d) For  $\beta = 0$ , study for varying parameter  $\alpha$  the stability of the nonlinear system in the neighborhood of point  $\mathbf{x}_0 = \mathbf{0}$  using the “direct” Lyapunov criterion and the function:  $V(\mathbf{x}) = x_1^2 + x_2^2 + x_3^2$ . Eventually, use the La Salle - Krasowskii criterion.

25. Compute the 2 equilibrium points  $\tilde{\mathbf{x}}_1$  and  $\tilde{\mathbf{x}}_2$  of the following *discrete-time* nonlinear system:

$$\begin{cases} x_1(k+1) &= 2x_2(k) \\ x_2(k+1) &= x_1(k) + x_2(k)(3 - x_1(k)) \end{cases} \Rightarrow \begin{cases} \tilde{\mathbf{x}}_1 &= ( \quad , \quad ) \\ \tilde{\mathbf{x}}_2 &= ( \quad , \quad ) \end{cases}$$